

FS800 ANCHOR SLING

FALL SAFE® FS800 it's an anchor sling with a 25 mm webbing polyester and a minimum breaking strength of 22 kN.



EAN CODE	LENGTH (M)	WEIGHT (KG)
5605423820454	0,50	0,060
5605423420197	0,60	0,070
5605423802528	0,75	0,075
5605423420173	0,80	0,080
5605423420029	1,0	0,110
5605423420142	1,20	0,113

EAN CODE	LENGTH (M)	WEIGHT (KG)
5605423820799	1,50	0,140
5605423420036	2,0	0,226
5605423420135	2,5	0,230
5605423420159	3,0	0,510
5605423420227	4,0	0,680
5605423420180	6,0	0,740

APPLICATIONS

Construction | Rope access | Tower climbing




STANDARDS

CE EN795:2012-B

FS800 ANCHOR SLING

FEATURES

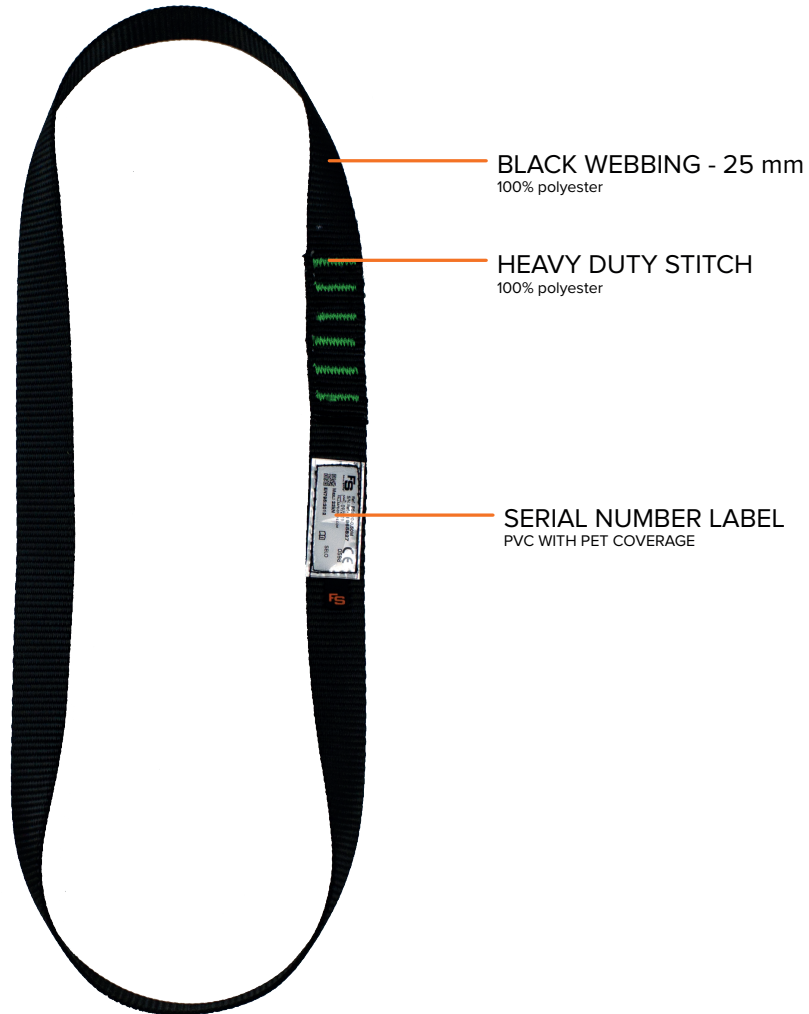

PHYSICAL PROPERTIES

Material	PES - 100% Polyester
Webbing	100% polyester Breaking strength (min.) 2100 kg Weight 43g/ m Thickness 1.65 mm
Stitch	100% polyester Breaking load (min.) 22 kN
Strength	22 kN

OTHER INFORMATION

Device lifespan	10 years
Using	Intended for using by only one person
Inspection requirement	Yearly
Traceability	Serial Number/ QR Code
Manual Instructions	www.fallsafe-online.com +351 252 480 060