


Data sheet

DOUBLE O TRI 2.0

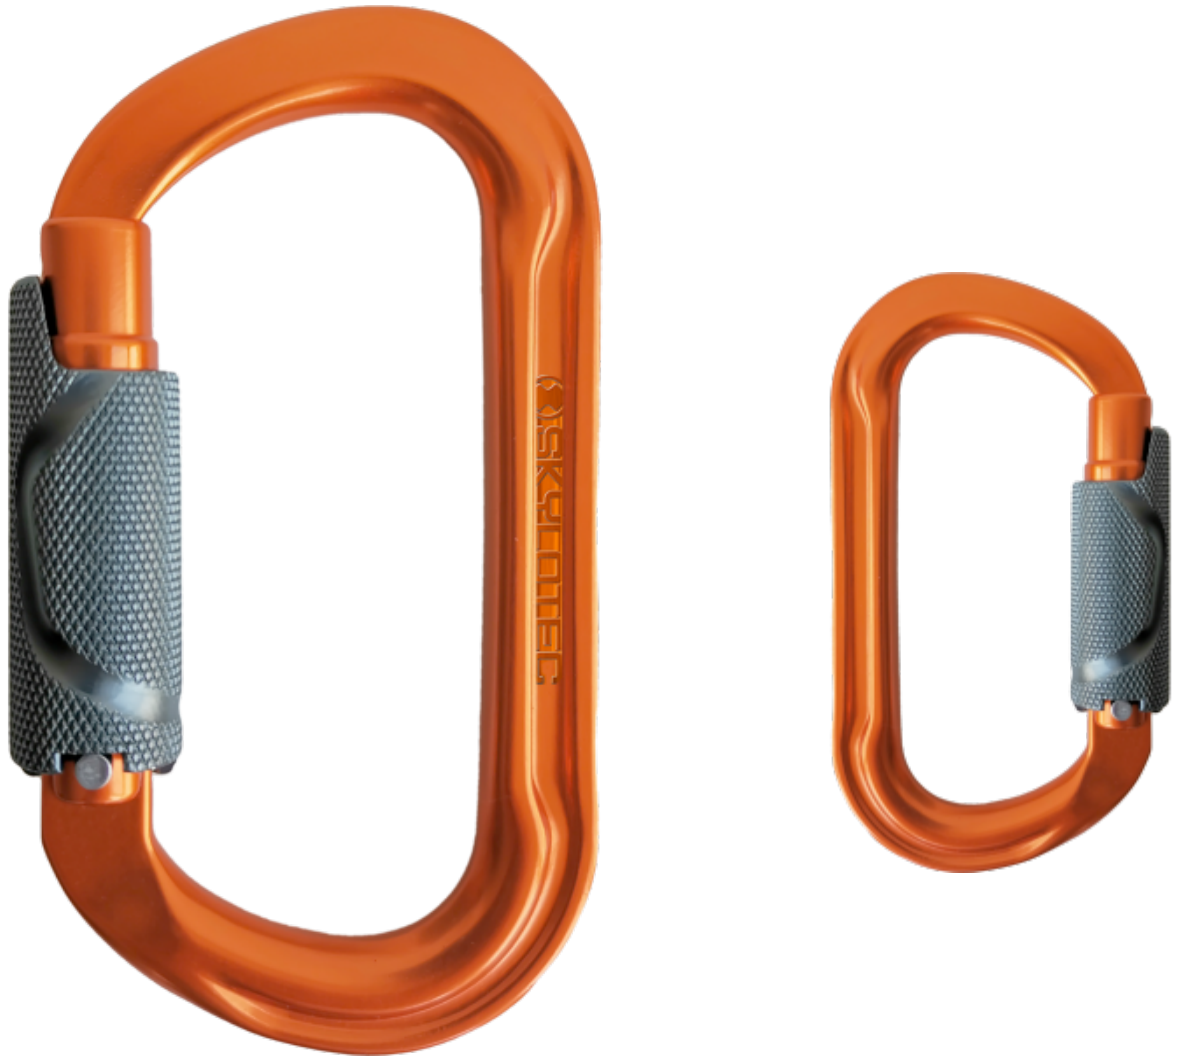

GENERAL

Art. no.:	H-209-PK	E-class number:	40-02-01-05
EAN:	4030281303862	Customs no.:	76169990
Standard:	EN 12275-B:2013 EN 362-B:2004		

Data sheet

DOUBLE O TRI 2.0

Oval carabiner with DOUBLE TRIPLE gate. Ideal for use in rigging systems or with belay / abseil devices, ropes, pulleys.

- Symmetrical shape allows the carabiner to self-center and work in both directions.
- Patented double gate usable by both left- and right-handers
- I-Profile spine to optimize strength / weight ratio
- Wider cross-sections at the points exposed to abrasion (apex /crown and base)

GENERAL

Internat. standard: UIAA 121:2018

FEATURES

Colour: orange / grey

Breaking load, major axis:
25,00 kN

Breaking load, minor axis:
7,00 kN

Breaking load, open: 7,00 kN

Max. working load: 2,50 kN

Max. opening: 20 mm

Max. service life: 30 Years

Patent

Area of application:

Arborists, Rope Access / Rigging, Rope Courses

DIMENSIONS

Size:	113x64mm
Weight:	0,08 kg

HARDWARE

Locking system:	Tri
-----------------	-----

MATERIAL

Material:	Aluminium
-----------	-----------